

CP2000-SW-BH

Low-Volume Undercounter Chilled Still Water Chiller



Low-volume undercounter chiller unit that provides chilled still water. Self-contained refrigeration designed for undercounter installation up to 6' from draft tower. Suitable for office, hotel suites, wineries, and residential.

Features

- Up to 50, 12oz drinks/hour (<40°F)
- Chilled still water
- High-efficiency self-contained refrigeration
- Built-in re-circulatory pump allows for an installation distance up to 6' between tower and chiller
- Copper water chilling coil

R290



Accessories

- Water filter system (required):
 - CR-14FC: Single filter system, compact fibredyne filters, reduce chlorine, taste, odor, color while retaining the good minerals that are essential for bottle quality tasting water, 18”H x 8”W, 2.5 gpm, 15,000 gal, TOC & ½ micron filtration
 - CR-14FCP: Single filter system with prefilter, compact fibredyne filters, reduce chlorine, taste, odor, color and organic chemicals while providing exceptional sediment reduction with resistance to premature plugging, 15”H x 14”W, 2.5 gpm, 15,000 gal, TOC & ½ micron filtration
- Install kit (required):
 - CR-KIT-CPUC: Installation kit for CP2000-R-UC-BH, includes LBS-10JG leak block sensor, water pressure reducer valve, fittings, and extra tubing to install the filter systems and undercounter unit
- Use with CBR-V1 series draft tower and drain pan




CP2000-SW-BH

Low-Volume Undercounter Chilled Still Water Chiller



Scan for more resources!

Line Drawings

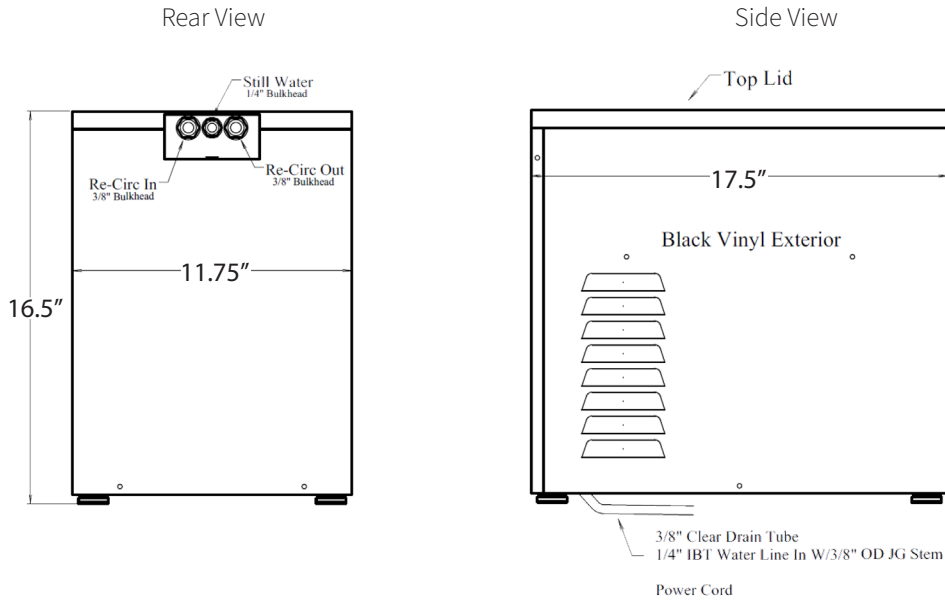

- 3/8" Water inlet push in fitting at back of unit
- 7' Over flow drain hose
- 9' Electrical cord NEMA 5-15
- Trunkline connections at the top, back of unit
- Ensure well-ventilated space or cabinet
- Allow for 6" rear & side clearance for air flow
- Air intake on side panels, exhausts out rear

Capacity	50, 12oz drinks/hour (<40°F)
Refrigerant	R290
Width	11.75"
Depth	17.5"
Height	16.5"

Operating temp	40°F-100°F
Electrical	120v - 2.42 Amps
Water bath	2.5 gal
Ice bank	6 lbs
Weight	75 lbs

Issued 1/28/2026